General Landscape Notes

1. The Contractor is responsible for protecting and maintaining all existing utilities throughout the duration of the contracted work.
2. The Contractor is responsible for protecting all trees, shrubs and structures to be saved or protected.
3. The Contractor shall contact "Dig-Safe" prior to any site preparation or excavation.
4. The Contractor shall contact the Landscape Architect if field conditions require adjustments to construction.
5. Unless otherwise directed, all debris from tree work and/or shrub removal shall be removed from the project site and properly disposed of. Any remaining stumps shall be removed.
6. Prior to commencement of work, the Contractor shall confirm the location of property lines where critical to building setbacks and/or planting within the property boundary. Alignment of plant bed lines shall be staked by the Contractor for approval of the Landscape Architect.
7. All plants shall be the highest quality, heavy nursery-grown stock and sized according to Massachusetts Nurserymen's Association Standards. No substitutions will be permitted without the prior approval of the Landscape Architect.
8. Topsoil for plant beds and pits shall be good quality sandy loam devoid of roots, clods, stones, rubbish, glass, brick, or asphalt. Soil should be between pH 6 and 7, and have good fertility and organic content.
9. Plant beds shall have a minimum soil depth of 10" unless otherwise specified and be mulched with 2-3" of finely shredded pine bark mulch. Groundcover area should have a 1 ½ - 2" mulch depth.
10. All plant material shall be guaranteed for one full year from the completion of the installation.
11. All seeded and sodded areas shall have 6" of screened loam, spread and finely graded according to the plans. All areas indicated of the dimening and disturbed areas not otherwise indicated, shall receive 6" of loam previously stripped and stockpiled with the addition of 3" loam borrow tilled together and finely graded over all areas to receive seed. Loam borrow shall consist of friable soil typical of locally cultivated soils containing a minimum of 2% decayed organic matter, no clods, sticks and debris, and have a pH of 6 to 7. Test soil for acidity, fertility and texture by a reputable soils testing lab. Amend soil with lime and fertilizers accordingly. Rake until surface is smooth, friable, and uniform in texture to the elevations indicated on the drawings. Seed evenly at a rate of 5 lbs. per 1000 square feet or according to the manufacturers instructions. Lay sod with hand-tight joints. Irrigate immediately and as necessary to provide one inch of water per week while the seed germinates and sod takes root until the grass is thoroughly established.
12. All disturbed areas within the contract limit line or project area shall be finely graded with screened loam to the proper elevations, and seeded or returned to as natural a state as approved by the Landscape Architect.
13. The contractor is responsible for insuring that proper drainage is achieved away from all buildings in accordance with the plans. See also note #4.
14. All dimensions and quantities shall be field verified by the contractor prior to ordering materials or construction.
15. It is the responsibility of the contractors issues to all work conforms to the Massachusetts State Building Code, the National Electrical Code, and all other applicable codes and regulations.

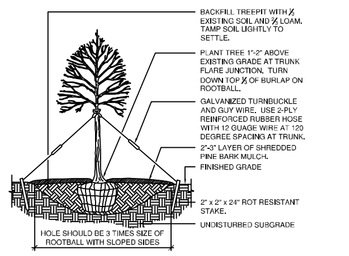

TREE PLANTING DETAIL

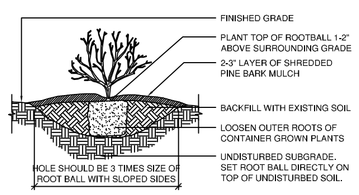

SHRUB PLANTING DETAIL

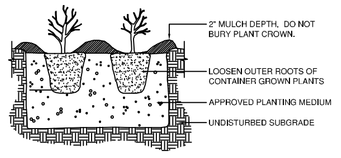

GROUNDCOVER & PERENNIAL PLANTING DETAIL

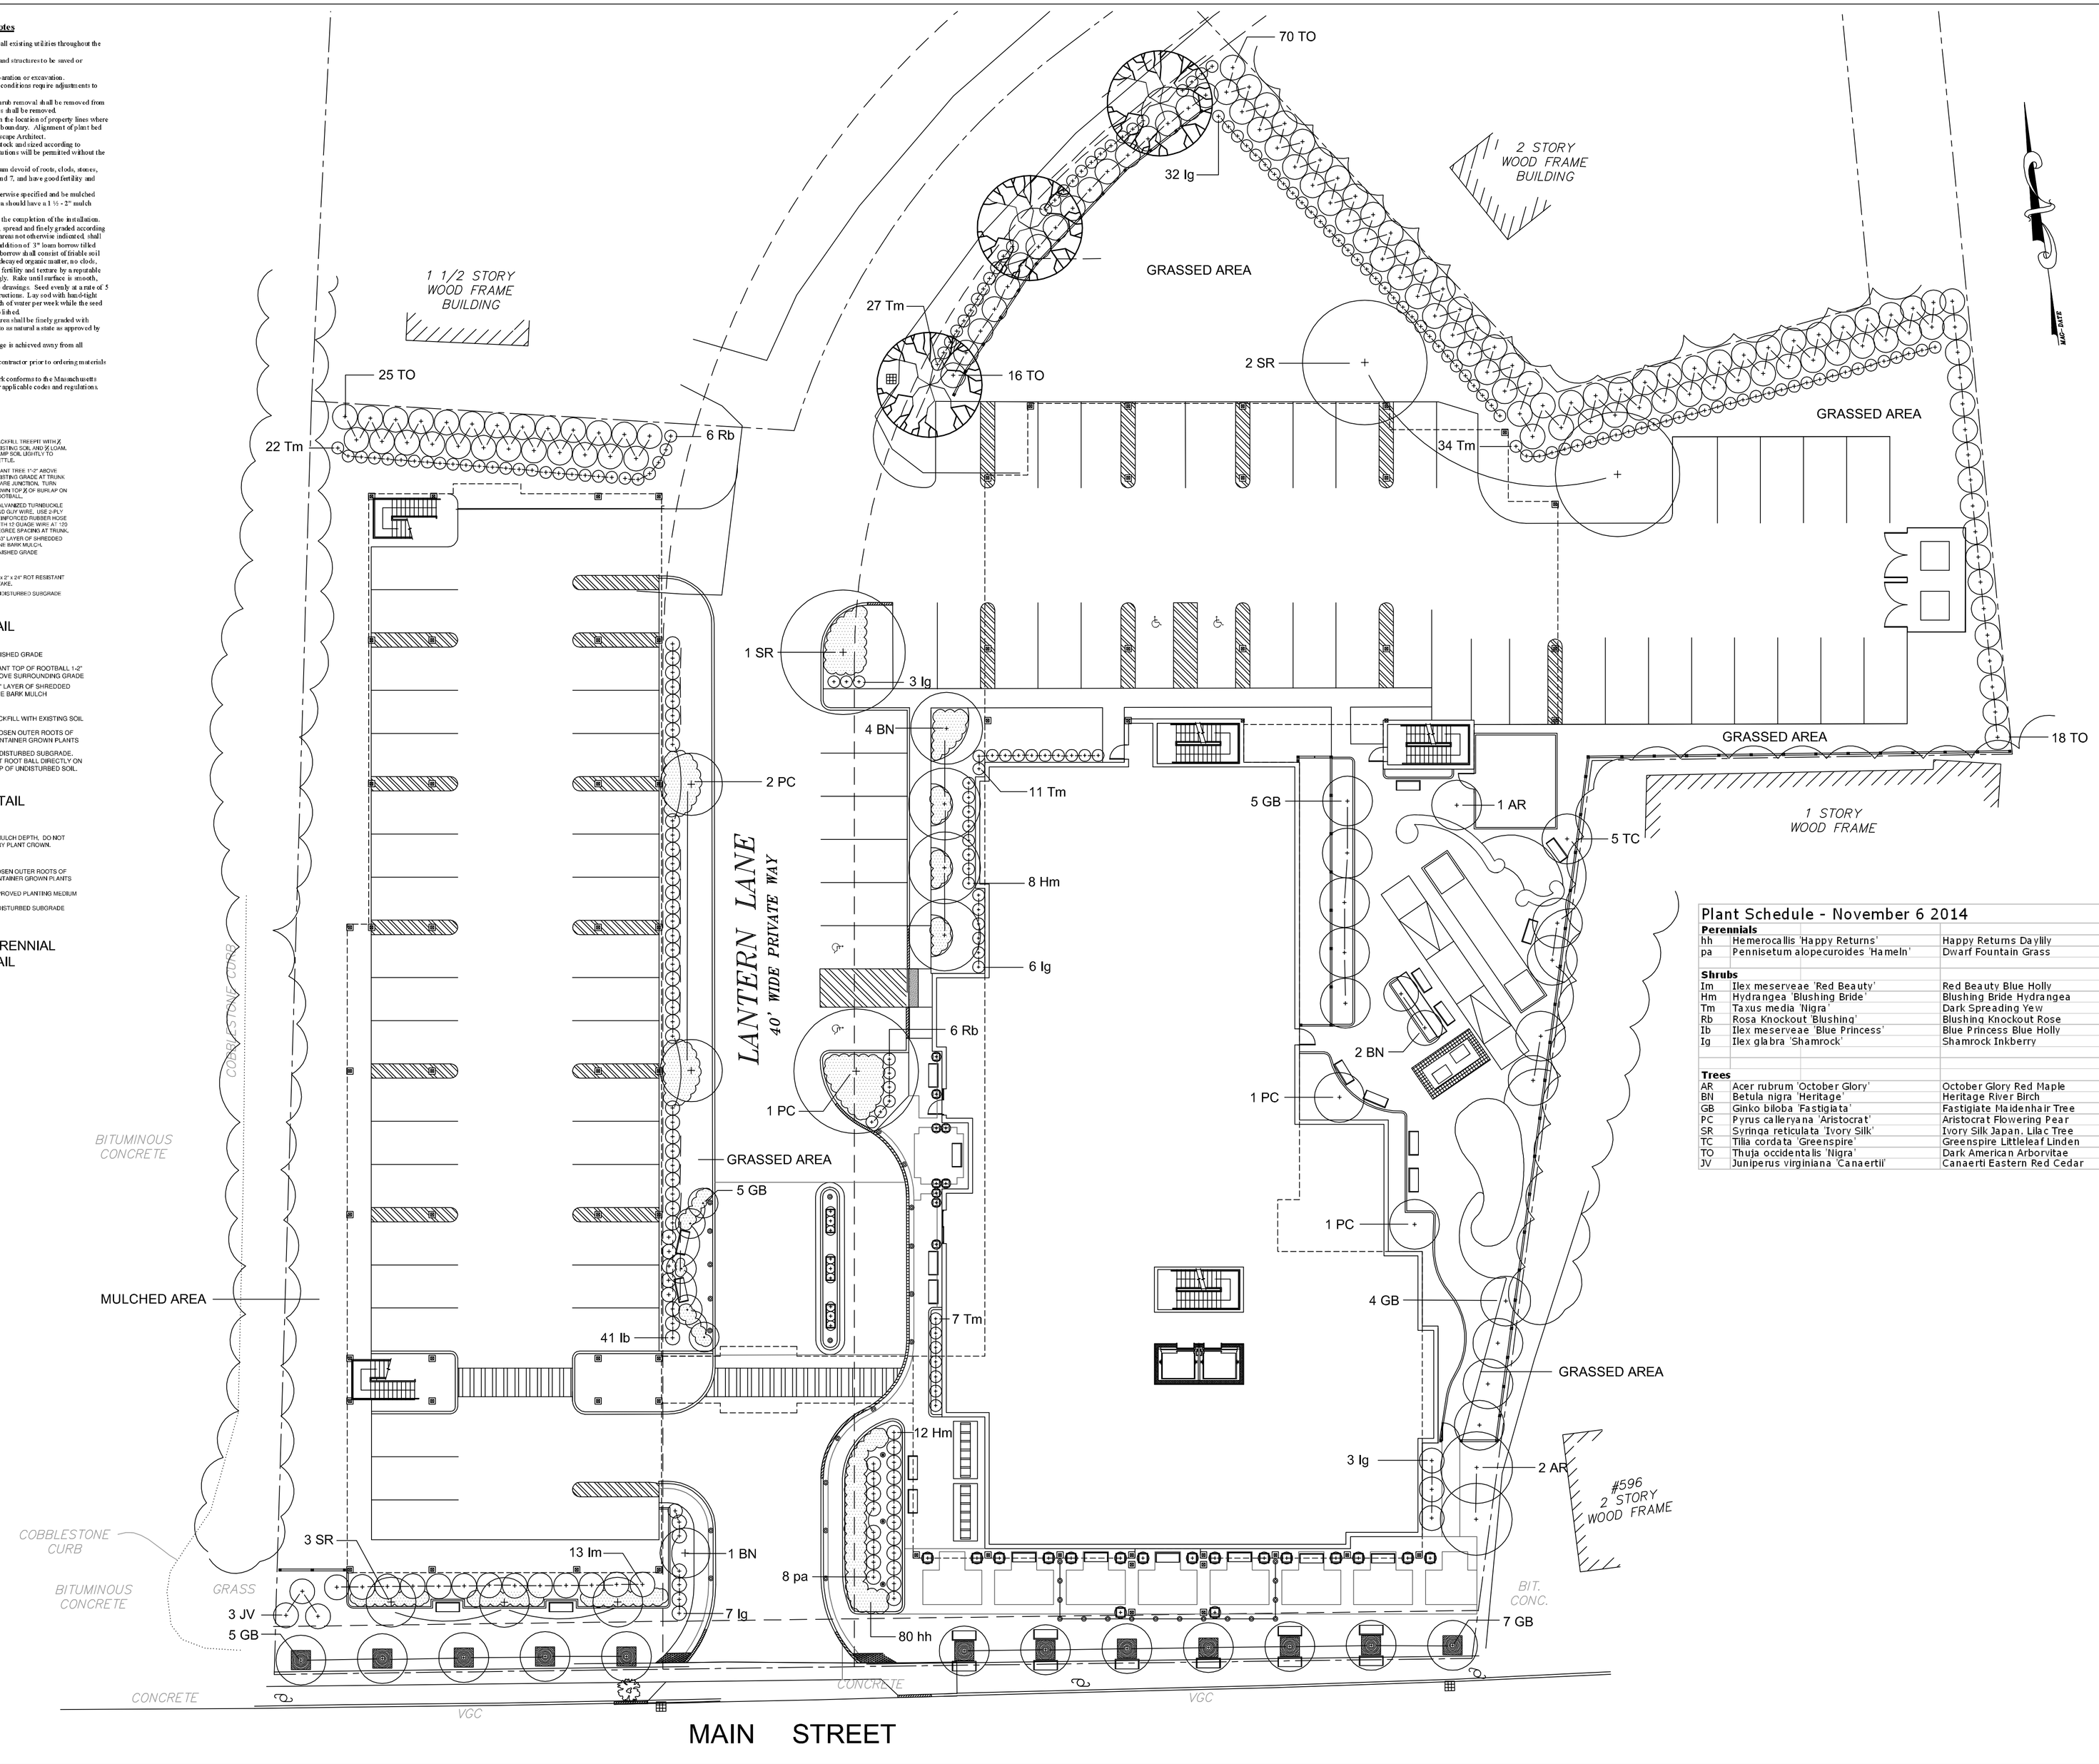

Plant Schedule - November 6 2014				
Perennials				
hh	Hemerocallis 'Happy Returns'	Happy Returns Daylily	80	#2 pot
pa	Pennisetum alopecuroides 'Hameln'	Dwarf Fountain Grass	8	#2 pot
Shrubs				
Im	Ilex meserveae 'Red Beauty'	Red Beauty Blue Holly	13	5-6'
Hm	Hydrangea 'Blushing Bride'	Blushing Bride Hydrangea	20	#5 pot
Tm	Taxus media 'Nigra'	Dark Spreading Yew	101	18-24"
Rb	Rosa Knockout 'Blushing'	Blushing Knockout Rose	12	
Ib	Ilex meserveae 'Blue Princess'	Blue Princess Blue Holly	41	4-5'
Ig	Ilex glabra 'Shamrock'	Shamrock Inkberry	51	18-24"
Trees				
AR	Acer rubrum 'October Glory'	October Glory Red Maple	3	2.5-3" cal.
BN	Betula nigra 'Heritage'	Heritage River Birch	7	16-18' m/s heavy
GB	Ginko biloba 'Fastigiata'	Fastigiate Maidenhair Tree	26	3-3.5" cal.
PC	Pyrus calleryana 'Aristocrat'	Aristocrat Flowering Pear	5	3-3.5" cal.
SR	Syringa reticulata 'Ivory Silk'	Ivory Silk Japan. Lilac Tree	6	3-3.5" cal.
TC	Tilia cordata 'Greenspire'	Greenspire Littleleaf Linden	5	3-3.5" cal.
TO	Thuja occidentalis 'Nigra'	Dark American Arborvitae	129	6-7'
JV	Juniperus virginiana 'Canaerti'	Canaerti Eastern Red Cedar	3	12-14' hvy.

JD LaGrasse & Associates, Inc.
Architects - Engineers - Interiors - Land Planning
One Elm Square, Andover, MA 01810
T. 978-470-3675 F. 978-470-3670
www.lagrassearchitects.com – E-mail: JDLA@AOL.COM

Elliott Brundage Landscape Design
190 High Plain Road Andover, MA 01810
t 978 470 4970 www.elliottbrundage.com

Springhill Suites by Marriott

556 Main Street Falmouth, MA

prepared for: Falmouth Hospitality, LLC

location: 2 Lan Drive Westford, MA 01886

Title: PLANTING PLAN

JDLAI 2014©

ALL PLANS, SPECIFICATIONS AND IDEAS ARE THE PROPERTY OF JDLAI. RIGHTS OF USE ARE CONDITIONAL AND ARE GRANTED UNDER FULL COMPENSATION AND LIMITED TO A ONE-TIME USE TO CONSTRUCT A SINGLE PROJECT ON THE SITE SO INDICATED. USE OF THE WORK AND ANY DERIVATIVE WORK COVERED UNDER THIS COPYRIGHT FOR OTHER PROJECTS IS PROHIBITED. THE USE OR REPRODUCTION OF THESE PLANS FOR ANY OTHER CONSTRUCTION OR PERMIT APPLICATION IS STRICTLY PROHIBITED WITHOUT PRIOR WRITTEN PERMISSION OF JDLAI.

Mark	Date
#	REV6
#	REV5
#	REV4
#	REV3
#	REV2
#	REV1 06NOV2014

Revisions

Date	7-23-14
Scale	1/16"=1'-0"
Job No.	2404
Sheet No.	L2