
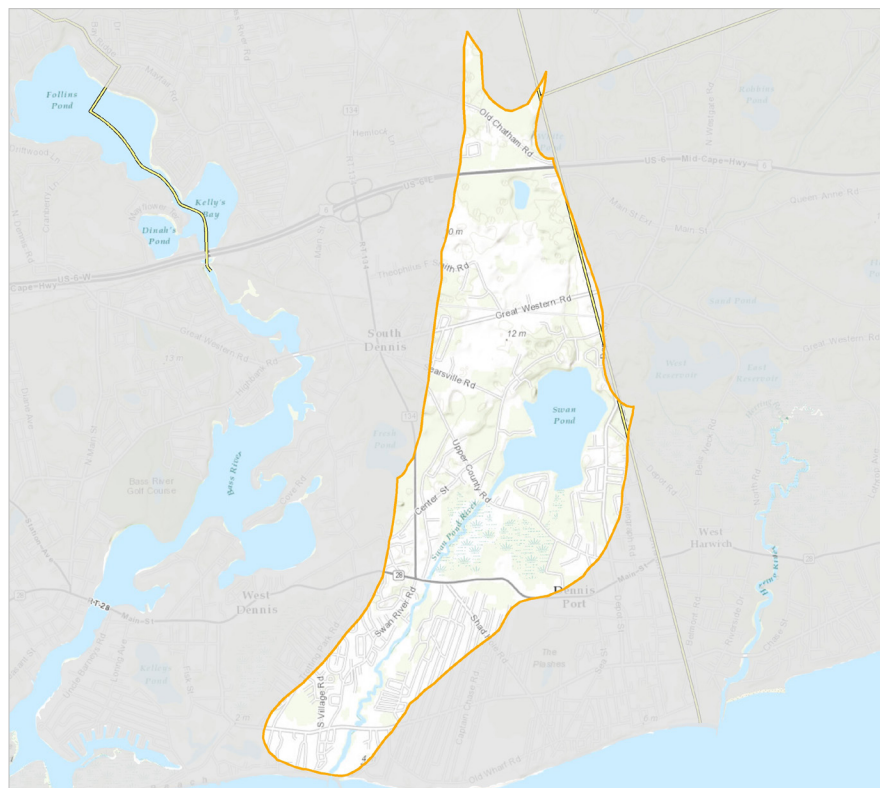


# Swan Pond River

DENNIS & HARWICH

HIGH



Swan Pond River Watershed

## Introduction to the Watershed Reports

In 2001, the Massachusetts Estuaries Project (MEP) was established to evaluate the health of 89 coastal embayment ecosystems across southeastern Massachusetts. A collaboration between coastal communities, the Massachusetts Department of Environmental Protection (MassDEP), the School of Marine Science and Technology (SMST) at the University of Massachusetts-Dartmouth, the US Environmental Protection Agency (US EPA), the United States Geological Survey (USGS), the Massachusetts Executive Office of Energy and Environmental Affairs (EEA), and the Cape Cod Commission, the purpose of the MEP is to identify nitrogen thresholds and necessary nutrient reductions to support healthy ecosystems.

The Cape Cod 208 Plan Update, certified and approved by the Governor of the Commonwealth of Massachusetts and the US EPA in 2015, provides an opportunity and a path forward to implement responsible plans for the restoration of the waters that define Cape Cod.

On Cape Cod there are 53 embayment watersheds with physical characteristics that make them susceptible to nitrogen impacts. In its 2003 report, “The Massachusetts Estuaries Project – Embayment Restoration and Guidance for Implementation Strategies”, MassDEP identifies the 46 Cape Cod embayments included in the

MEP. Thirty-three embayments studied to date require nitrogen reduction to achieve healthy ecosystem function. A Total Maximum Daily Load (TMDL) has been established (or a draft load has been identified and is under review) for these watersheds. For those embayments not studied, the 208 Plan Update recommends planning for a 25% reduction in nitrogen, as a placeholder, until information becomes available.

The 208 Plan Update directs Waste Treatment Management Agencies (WMAs) to develop watershed reports within 12 months of certification of the Plan Update. The Watershed Reports outline potential “bookend” scenarios for each watershed that include two scenarios to meet water quality goals in the watershed – a traditional scenario, which relies completely on the typical collection and centralized treatment of wastewater, and a non-traditional scenario, which uses remediation, restoration, and on-site reduction techniques to remove nutrients from raw and treated wastewater, groundwater and affected waterbodies.

The intent of the Watershed Reports is to outline two distinct approaches for addressing the nutrient problem. The reports are not intended to identify preferred and detailed plans for each watershed, but to facilitate discussions regarding effective and efficient solutions, particularly in watersheds shared by more than one town. In some cases, towns have provided information on collection areas and non-traditional technologies that have been specifically considered by that town.

The 208 Update developed a regionally consistent database of the nitrogen load entering each watershed. This data set includes estimates of wastewater, stormwater and fertilizer loads - similar to methodologies used by the MEP. Using this regionally consistent database, the Watershed MVP tool (wMVP) was developed so that different strategies (i.e., bookend scenarios) to reduce excess nitrogen load

could be evaluated. The Watershed Reports use the MEP recommendations for the required nitrogen load reductions necessary to meet the threshold loads (that serve as the basis for nitrogen management), and then use the wMVP and the regionally consistent database values to develop bookend scenarios. There are variations of load between the MEP and wMVP, primarily due to differences in comparing older and newer databases.

## Terms Defined

**Total nitrogen load:** the nitrogen load from the watershed contributed by septic, wastewater, fertilizer, stormwater, golf course, landfill, and natural sources.

**Attenuated nitrogen load:** the nitrogen load from the watershed that reaches the embayment after the effect of natural attenuation in wetlands, ponds or streams.

**Threshold:** the amount of nitrogen that a water body can receive from its watershed and still meet water quality goals; this number is based on MEP technical reports or Total Maximum Daily Load (TMDL) reports.


**Reduction target:** an approximation of the amount of nitrogen that needs to be removed from the watershed to achieve the threshold; this number is calculated by subtracting the threshold number from the attenuated total watershed load, and is for planning purposes only.

**Percent contribution:** the percent of attenuated nitrogen load that a town contributes to the watershed.

**Kilogram responsibility:** is calculated by applying the percent contribution to the reduction target and indicates the amount of nitrogen, in kg, that a community is responsible for addressing.

**Total Maximum Daily Load:** a regulatory term in the Clean Water Act, describing a value of the maximum amount of a pollutant that a body of water can receive while still meeting water quality standards. Establishing a TMDL is necessary when a water body has been listed on the 303D list of impaired waters.

# Swan Pond River

**DENNIS & HARWICH**
**HIGH**


The Swan Pond embayment system is mainly located in the Town of Dennis with a small portion in Harwich. It is comprised of a large inland basin that is connected to Nantucket Sound by a 1.8 mile tidal river. The estuary supports a variety of recreational uses including: boating, swimming, shell fishing, and fin fishing. However, because the tidal flushing is so restricted, Swan Pond has had a history of eutrophic events that have impacted the summer community.

## The Problem

The Massachusetts Estuaries Project (MEP) technical report (available at <http://www.mass.gov/eea/agencies/massdep/water/watersheds/the-massachusetts-estuaries-project-and-reports.html>) indicates that the Swan Pond system exceeds its critical threshold for nitrogen, resulting in impaired water quality. A MEP technical report has been completed and a draft Total Maximum Daily Load (TMDL) for nitrogen has been developed and approved.

- **MEP TECHNICAL REPORT STATUS:** Final
- **TMDL STATUS:** Final TMDL

Watershed nitrogen load characteristics were published in the 2012 MEP report for Swan Pond River, reflecting current conditions at the time of writing:

- **TOTAL ATTENUATED NITROGEN LOAD (MEP CHAPTER VIII):** 15,956 Kg/Y
  - Note: The scenario presented by the Town of Dennis uses an attenuated buildout load of: 18,192 Kg/Y
- **SOURCES OF ATTENUATED WATERSHED NITROGEN LOAD:**
  - 77% Septic Systems
  - 7% Fertilizer
  - 13% Stormwater From Impervious Surfaces
  - 3% Landfill

Since the MEP report, the Commission compiled the following updated water use and nitrogen loads using the regional wMVP database (see page 2), enabling a more current estimate of nitrogen loading. Towns have also submitted watershed characteristics that may differ from wMVP. Differences may be explained by different source years of water use data, or other assumptions. Both values are presented, when provided:

### ■ REGIONAL DATABASE (WMVP)

- See figure on page 1 for watershed boundary delineation
- Total Wastewater Flow: 120 MGY (million gallons per year)
- Treated Wastewater Flow: 0 MGY
- Septic Flow: 120 MGY
- Total Attenuated Nitrogen Load: 16,759 Kg/Y

### ■ TOWNS OF DENNIS AND HARWICH/CDM REPORTED VALUE

- Total Wastewater Flow: 111 MGY
- Treated Wastewater Flow: 0 MGY
- Septic Flow: 111 MGY

## CONTRIBUTING TOWNS

Percent contributions listed below are the aggregate sub-embayment contributions identified in Appendix 8C of the Cape Cod Section 208 Plan Update (contributions are based on attenuated load where available). See Appendix 8C for detailed town allocations by sub-embayment.

- DENNIS: 98%
- HARWICH: <1%
- BREWSTER: 1%\*

\*Under existing conditions, the load contributed by Brewster is so small that reductions are not necessary at this time; however, growth management measures should be taken to ensure that the contribution does not increase. Contributions will be reevaluated at least every five years, based on updated data.

## THE MEP RESTORATION SCENARIO

- WATERSHED TOTAL ATTENUATED NITROGEN REDUCTION TARGET: 75.5%
- WATERSHED SEPTIC REDUCTION TARGET: 100%  
(The scenario represents the aggregated sub-embayment percent removal targets from the MEP technical report)

## SWAN POND RIVER ESTUARY

- EMBAYMENT AREA: 181 acres
- EMBAYMENT VOLUME: Unknown
- 2014 INTEGRATED LIST STATUS: Category 5 for fecal coliform
  - Category 5: Waters requiring a TMDL
  - [www.mass.gov/eea/docs/dep/water/resources/07v5/14list2.pdf](http://www.mass.gov/eea/docs/dep/water/resources/07v5/14list2.pdf)

## SWAN POND RIVER WATERSHED

General watershed characteristics according to the current wMVP regional database (see figure on page 1 for watershed boundary) follow. Towns have also submitted watershed characteristics that may differ from wMVP. Differences may be explained by changes due to development in the intervening years, or other assumptions. Both values are presented, when provided:

## WATERSHED CHARACTERISTICS

### Regional Database (wMVP):

- 1,901 Acres
- 2,374 Parcels
- 81% Residential Parcels
- 0.8 acres per parcel




### Towns of Dennis and Harwich/CDM Reported Values:

- 1,855 Acres
- 2,494 Parcels
- 81% Residential Parcels
- 0.74 acres per parcel

## Freshwater Sources

### PONDS

- IDENTIFIED SURFACE WATERS: 7
- NUMBER OF NAMED FRESHWATER PONDS: 2

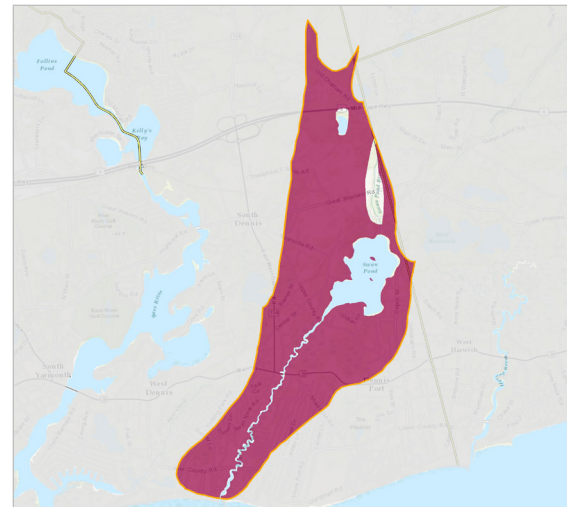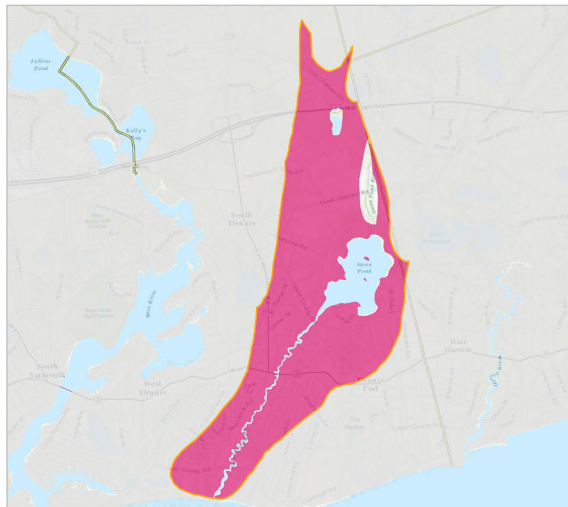

### Subwatersheds with Total Attenuated Watershed Removal Targets

(Left) Benthic and atmospheric loads directly on embayments are not included.

### Subwatersheds with Septic Attenuated Nitrogen Removal Targets

(Right)

- **PONDS WITH PRELIMINARY TROPHIC CHARACTERIZATION:** 1
- **2014 INTEGRATED LIST STATUS:** None listed

Dennis has participated in the Pond and Lake Stewardship (PALS) program that has helped establish baseline water quality. Additionally, a Dennis ponds report was completed with funding from Barnstable County through the Cape Cod Commission in 2009, providing detailed information for a number of Dennis ponds.

## STREAMS

- **SIGNIFICANT FRESHWATER STREAM OUTLETS:** 1
  - Stream: Hyda Way Creek
    - Average Flow: 453 cubic meters per day
    - Average Nitrate Concentrations: 0.218 mg/L

Stream data from MEP technical report. Nitrate concentrations higher than 0.05 mg/L background concentrations, evident in public supply wells located in pristine areas, provide evidence of the impact of non-point source pollution on the aquifer and receiving coastal water bodies.

## DRINKING WATER SOURCES

- **WATER DISTRICTS:** 1
  - Dennis Water District
- **GRAVEL PACKED WELLS:** 1
  - 1 has nitrate concentrations between 0 and 0.5 mg/L
- **SMALL VOLUME WELLS:** 0

Drinking water data from Cape Cod Commission and MassDEP data sources – nitrate values obtained from drinking water wells are from 2009-2012. The state and federal drinking water

limit for nitrate is 10 mg/L. The Cape Cod Commission nitrate loading standard is 5 mg/L.

## Degree of Impairment and Areas of Need

For the purposes of the Section 208 Plan Update, areas of need are primarily defined by the amount of nitrogen reduction required as defined by the TMDL and/or MEP technical report. For watersheds that have a MEP technical report, but lack a finalized TMDL, the nitrogen loading information in the report is used. As described above 100% removal of the septic load, or 75.5% of the total nitrogen load, is required to restore ecological health in the Swan Pond River watershed. The MEP technical report also provides a specific targeted amount of nitrogen reduction required by subwatershed (see the figures: Subwatersheds with Total Attenuated Watershed Removal Targets and Subwatersheds with Septic Attenuated Nitrogen Removal Targets).

The nitrogen load from the watershed exceeds the threshold identified by MEP for Swan Pond River, resulting in impaired water quality. The ecological health of a water body is determined from water quality, extent of eelgrass, assortment of benthic fauna, and dissolved oxygen and ranges from severe degradation, significantly impaired, moderately impaired, or healthy habitat conditions.

## MEP ECOLOGICAL CHARACTERISTICS AND WATER QUALITY

The MEP report provides the following characterization of the estuary's health:

- **OVERALL ECOLOGIC CONDITION:** Moderately Impaired to Severely Degraded
- **UPPER SWAN POND RIVER:** Moderately to Significantly Impaired
- **LOWER SWAN POND RIVER:** Moderately Impaired
- **SWAN POND:** Significantly Impaired to Severely Degraded
- **SENTINEL STATION:**
  - Total Nitrogen Concentration Threshold: 0.398 mg/L
  - Total Nitrogen Concentration Existing: 0.661 mg/L (As reported at the MEP sentinel water-quality monitoring station)

## Traditional & Non-Traditional Scenarios

### SCENARIO DEVELOPMENT

Through the 208 Stakeholder process, the Commission developed “bookend” scenarios – one looking at a possible solution using traditional collection and treatment, the other examining a possible suite of non-traditional technologies – to address the nitrogen management needs in each watershed. These bookend scenarios provide guidance for communities as they continue to discuss alternatives, priorities, and opportunities for identifying well-considered solutions that will address communities’ needs and interests.

### REGIONAL DATA

In preparation for this effort, the Commission collected regionally consistent data for the purposes of watershed scenario development. Both parcel data and water use data was identified and collected for the entire region. While the scientific basis for planning is the thresholds identified in the MEP technical reports, each report uses data from different years, and in some cases the MEP data used are 10 or more years old. In addition, there are watersheds on Cape Cod without the benefit of an MEP report; therefore, similar data was not available for planning purposes.

The updated regional data set was used to estimate wastewater, stormwater and fertilizer loads, using the same methodologies as the MEP. This approach allows for a reevaluation of existing development, which may have changed

in the last 10 years. Parcel data included in the regional database is from 2010-2012 and water use data is from 2008-2011, depending on the water supplier and based on best available data. This approach allows for regionally consistent watershed scenario development.

### WATERSHED SCENARIOS

The watershed scenarios that follow outline possibilities for the watershed. A series of non-traditional technologies that might be applicable are included, as well as the amount of residential load that would need to be collected if a traditional collection system and treatment facility was implemented. The pie charts show the load to be collected for treated effluent disposal both inside and outside the watershed.

Site specific analyses of collection areas may result in the need to collect wastewater from more or fewer parcels to meet the nitrogen reduction target. The scenarios presented are conceptual and are meant to inform discussions regarding effective and efficient solutions; they are not specific recommendations and should be viewed as resource information for additional and more detailed wastewater management planning.

In Swan Pond River, the Towns of Dennis and Harwich have done additional and more detailed planning. Included in the last section of this report is a description of their efforts, along with details of plans developed to date.












#### TOTAL ATTENUATED NITROGEN LOAD VALUES (FROM WMVP)

Swan Pond River Nitrogen Sources	Total Attenuated Watershed Nitrogen Load (kg-N/yr)
Wastewater <sup>1</sup>	12,754
Fertilizer <sup>2</sup>	1,136
Stormwater	2,044
Other <sup>3</sup>	825
<b>TOTAL WATERSHED LOAD</b>	<b>16,759</b>
Total Watershed Threshold	3,915
<b>TOTAL ATTENUATED LOAD TO BE REMOVED</b>	<b>12,844</b>

1. Includes nitrogen loads from septic systems and wastewater treatment facilities.
2. Includes nitrogen loads from lawns, cranberry bogs, and golf courses.
3. Includes nitrogen loads from landfills and atmospheric deposition to vacant land.


## Traditional & Non-Traditional Scenarios

### Non-Traditional

UNIT OF APPLIED TECHNOLOGY	ATTENUATED NITROGEN REMOVED IN KG/Y
 25 % Nitrogen Reduction - Fertilizer Management	284
 25 % Nitrogen Reduction - Stormwater Mitigation	511
 9,400 Linear Feet - Permeable Reactive Barrier (PRB) (Capture load calculated by wMVP: 4,520 kg/Y)	3,277
 15 Acres - Fertigation - Turf	60
 20 Acres - Fertigation - Cranberry Bogs	240
 11 Acres - Aquaculture/Oyster Beds	2,750
 8 Acres - Coastal Habitat Restoration	936
 7,500 Square Feet - Floating Constructed Wetlands	3,000
 190 Units - Ecotoilets (UD & Compost)	482
 291 Units - I & A Systems	482
 229 Units - Enhanced I & A Systems	682
<b>TOTAL</b>	<b>12,704</b>

A summary of the approach and methodology that was applied using non-traditional technologies follows at the end of this report.

### Traditional

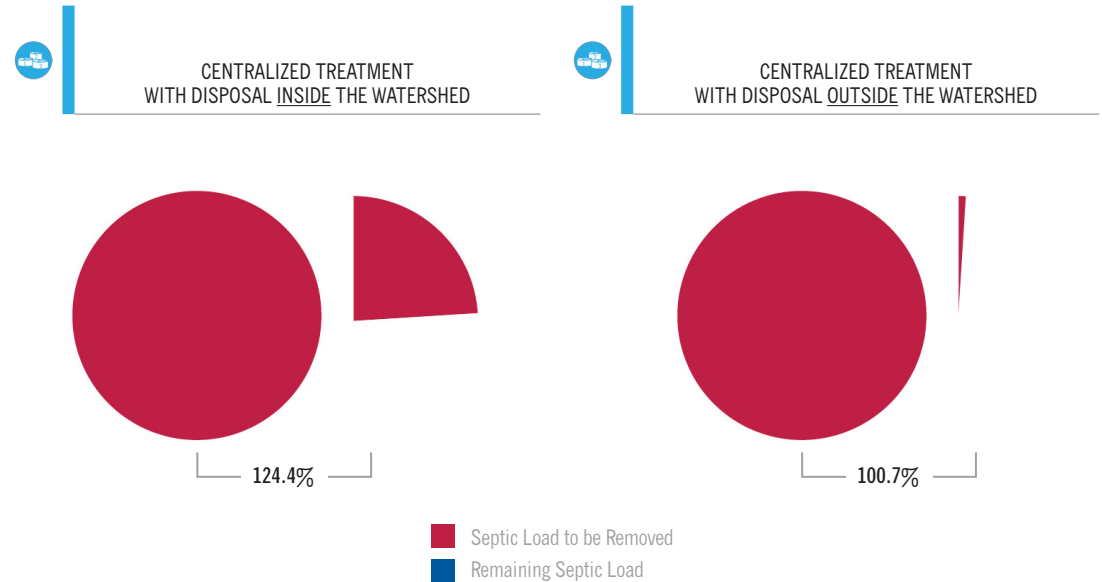

Assumes load to be collected and treated is disposed in the watershed, requiring additional collection to offset the load.

The watershed nitrogen threshold cannot be met by collecting 100% of the septic load in the watershed and returning the treated load to the watershed.

Assumes that the load to be collected and treated is removed from the watershed so no offset is required.

The watershed nitrogen threshold cannot be met by collecting 100% of the septic load in the watershed and disposing the treated load outside the watershed.

## Town of Dennis Local Progress

In August 2015, Dennis, led by its Comprehensive Wastewater Management Task Force (CWMTF) and its consultant CDM Smith, completed its Water Quality Evaluation and Mitigation Alternative Study Final Report. The report provides an updated needs assessment, as well as potential nitrogen management scenarios. The scenarios include locations and layouts of offsite wastewater solutions and other non-traditional nitrogen management technologies. Four scenarios were chosen for more detailed comparison and analysis. During the fall of 2015 and winter of 2016, Dennis evaluated these four scenarios, as well as additional community partnership scenarios with the neighboring Towns of Harwich and Yarmouth. The Massachusetts Estuaries Project (MEP) nitrogen reduction goals were the primary factor in the scenarios, but economic development goals and protection of non-nitrogen areas of concerns also shaped the chosen scenario (scenario 6A from the Water Quality Evaluation and Mitigation Alternative Study Final Report). This recommended plan proposes to include a minimum of six phases and will occur over a 30-year period.

All proposed scenarios in Dennis, including scenario 6A, include combinations of traditional sewerage methods with centralized treatment facilities, as well as non-traditional nitrogen management options including aquaculture, and permeable reactive barriers (PRB). Furthermore, the baseline of each scenario is the assumption that Dennis will implement stormwater and fertilizer management programs. As suggested in the 208 Plan Update, up to a 25% nitrogen reduction credit can be obtained by towns that implement

stormwater and fertilizer management programs to reduce nitrogen contributions to each watershed. To achieve 25% nitrogen reduction from stormwater in the Swan Pond River watershed, 50% of the total roads in the watershed are assumed to require stormwater best management practices (BMPs). Dennis plans to achieve 25% nitrogen reduction in fertilizers by implementing a town-wide fertilizer education program. In addition to implementing the stormwater and fertilizer management program, scenario 6A includes a hybrid sewer collection system with a mix of gravity, pressure and vacuum sewers and one centralized wastewater treatment facility. The recommended plan meets the MEP nitrogen reduction goals and also provides sewers to all of Dennis' planning districts and several areas of concern (AOCs). It also allows flexibility to implement partnership options. In the future, Dennis may implement sewerage in additional areas identified under Scenario 7A in the Water Quality Evaluation and Mitigation Alternative Study.

Since submission of the 208 Plan Update, the Town of Dennis and CDM Smith has met with Cape Cod Commission staff to discuss potential watershed scenarios and the use of the decision support tools generated through the 208 planning process. Cape Cod Commission staff participated in a November 2015 wastewater forum planned by the town and sponsored by the Board of Selectmen and CWMTF, to promote an understanding of the wastewater issues in Dennis, what is being done and what needs to be done. The forum was geared toward the local Financial Committee, Capital Committee,

Planning Board, Conservation Commission, Economic Development Committee, Water Quality Advisory Committee and any interested citizen. It is anticipated the town will submit a plan for regulatory review this year.

In June 2016, Dennis received \$15,000 from the Commission to evaluate effluent recharge sites and possible community partnerships. An additional \$35,000 was provided for the Towns of Dennis, Harwich and Yarmouth for a regional treatment facility cost study. Funding was part of \$142,149 in local grants made by the Commission in support of 208 Plan implementation.

At the Spring 2017 Town Meeting, Dennis voted to transfer \$300,000 from the Solar Special Revenue Fund to the Wastewater Stabilization Fund and to appropriate \$125,000 to establish a Swan Pond Shellfish Program.

In June 2017, Dennis submitted their CWMP to the Massachusetts Environmental Policy Act Office for review.



## Town of Dennis Watershed Scenario Details

Swan Pond River	CREDITS		REDUCTION TECHNOLOGIES			REMEDIATION AND RESTORATION TECHNOLOGIES			REMOVAL
NAME OF TECHNOLOGY	% Nitrogen Reduction	Load Reduction (kg-N/yr)	# Properties / Units	Flow Collected (gpd)	Load Reduction (kg-N/yr)	# Units Proposed	Unit Metric	Load Reduction (kg-N/yr)	Total Scenario Load Reduction (kg-N/yr)
Scenario									13,835**
Fertilizer Management	25%	266							
Stormwater Mitigation	25%	496							
Centralized Sewer			2,300	865,687	12,100				
Permeable Reactive Barrier (PRB)*						3,291	Linear Feet	700	
Aquaculture/Oyster Beds						5.5	Acres	1,100	

NOTES:

\* PRB located at effluent recharge site.

\*\* This value differs from the total of the values shown because it includes effluent recharge within the watershed as well as fertilizer management and stormwater management credits.

## Town of Harwich Local Progress

The Town of Harwich submitted its Draft Comprehensive Wastewater Management Plan (CWMP) for review in 2013 and its Final CWMP Single Environmental Impact Report (SEIR) in March 2016. The Massachusetts Environmental Policy Act (MEPA) Unit issued its certificate on May 13, 2016. Since 2007, Harwich wastewater planning efforts have been coordinated predominantly by the Wastewater Implementation Committee (WIC) and Board of Selectmen (BOS).

The recommended plan detailed in the CWMP was developed by the WIC and BOS working closely with their consultant, CDM Smith, Inc., and includes a core system of collection and conveyance utilizing two centralized treatment facilities. Implementation of the plan is phased over 40 years and was chosen as the preferred scenario because it allows for multiple effluent recharge sites in different watersheds, allows for easier phasing with adaptive management, presents a regional solution between the Towns of Harwich and Chatham (and potentially Dennis in the future), and reduces the overall size of the facilities in Harwich.

The plan also allows infrastructure components to be implemented, results monitored and the later program phases adapted as needed. The plan includes recommended non-infrastructure program components which include fertilizer and stormwater management programs, potential land use changes, open space acquisition, and several community involved conservation and pollution reduction programs.

Since Dennis contributes the majority of the nitrogen load to the Swan Pond River watershed, addressing nitrogen loading in the Swan Pond River watershed within Harwich was not the focus of the CWMP and therefore a scenario for Harwich is not included in this watershed report.

At the Spring 2017 Town Meeting, Harwich voted to fund design of a portion of phase 2 of the CWMP and the cost to implement the Chatham IMA and purchase capacity at the Chatham treatment facility for a total cost of \$9,035,000. In addition, Harwich voted to fund the Cold Brook restoration project (also part of phase 2 of the CWMP) in the amount of \$2,000,000.


# Scenario Maps

## Swan Pond River Watershed Scenario DENNIS

Representative locations of conceptually proposed infrastructure

### Legend

-  Aquaculture
-  Treatment & Effluent Recharge
-  Town Lines
-  Embayment Watersheds
-  Proposed Sewershed

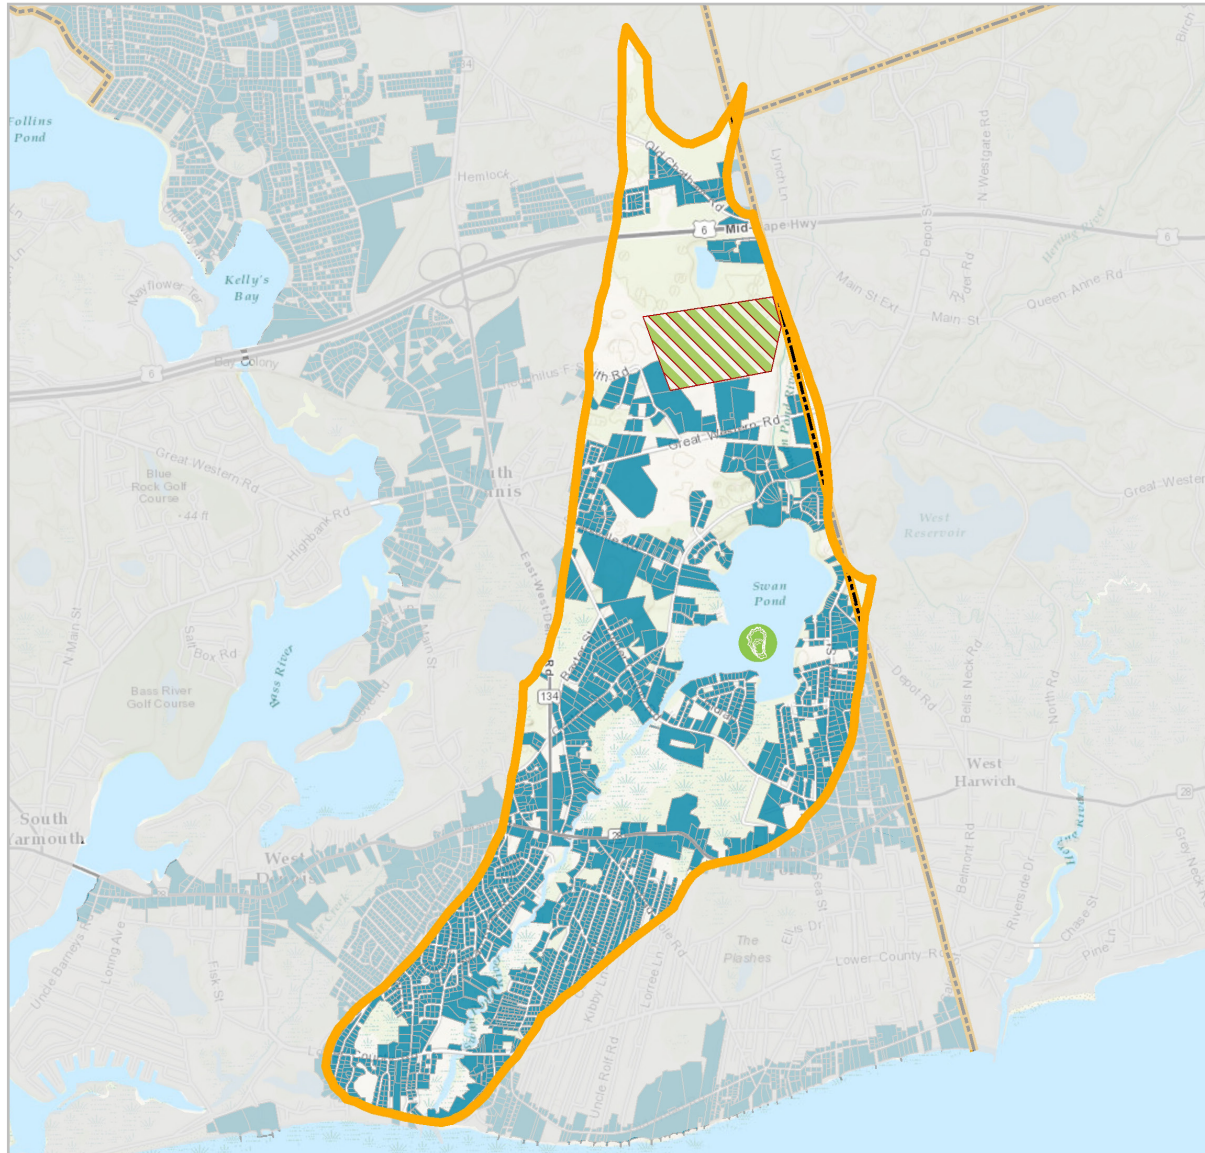

## Methodology for Selecting Non-Traditional Technology Scenarios

This section summarizes the approach and methodology that was applied during the 208 Update to develop plans for reducing nitrogen loading to estuaries using non-traditional (NT) technologies. It includes descriptions of regional credits for stormwater and fertilizer reductions, regional screening for potential sites for several technologies, and site-specific analyses for others. Nitrogen attenuation rates for each technology were derived from the Technologies Matrix. The nitrogen thresholds for each embayment were determined from the Massachusetts Estuaries Project (MEP).

This section summarizes the approach and methodology that was applied during the 208 Update to develop plans for reducing nitrogen loading to estuaries using non-traditional (NT) technologies. It includes descriptions of regional credits for stormwater and fertilizer reductions, regional screening for potential sites for several technologies, and site-specific analyses for others. Nitrogen attenuation rates for each technology are noted below, based on the Technologies Matrix or newer data. The nitrogen thresholds for each embayment were determined from the Massachusetts Estuaries Project (MEP).

Regional credits were developed for potential stormwater retrofits and fertilizer reductions. They were calculated as a percent reduction of existing nitrogen loads as identified in the MEP reports and updated GIS data developed by the Cape Cod Commission.

- **STORMWATER MANAGEMENT:** Most Cape communities have already begun the process of identifying significant untreated stormwater discharges and developing appropriate mitigation projects. With the prospect of the MS4 regulatory requirements it was assumed that additional mitigation efforts would be implemented. Based upon the evidence developed by the University of New Hampshire Stormwater Center that several vegetated stormwater management practices (including bioretention and constructed wetlands) are able to achieve nitrogen reductions of 50% or more and the assumption that only a portion (estimated at 50%) of identified sites would be retrofitted a 25% nitrogen reduction credit was assumed for each watershed. Specific locations and number of locations were not identified; this was deferred to individual towns to consider as part of the suite of nitrogen management strategies.
- **FERTILIZER REDUCTIONS:** Based upon the success of most Cape Cod towns to implement either regulatory or non-regulatory fertilizer management programs and the efforts of the Cape Cod Extension Service in

educating homeowners a 25% reduction in fertilizer applications was assumed for each watershed.

Regional GIS screening methods were developed to identify locations for some non-traditional technologies. A GIS viewer was developed as an on-line tool for staff and consultants to utilize during the watershed planning process.

- **CONSTRUCTED WETLANDS/ PHYTOREMEDIATION:** A GIS-based screening method was developed by the Cape Cod Commission to identify and rank parcels of land that have potential for the location of constructed wetlands and phytoremediation. The ranking utilized parcel size and ownership, depth to groundwater, suitable soils, distance from wetlands, and undeveloped parcels. A nitrogen removal rate of 500 kg/Y/acre and 532 kg/Y/acre was used for Constructed Wetlands and Phytoremediation, respectively.
- **PERMEABLE REACTIVE BARRIERS (PRBS):** A GIS-based screening method was developed to identify existing roads that are proximate to receiving waters, downgradient of high density development, run perpendicular to groundwater flow (to have the highest potential to intercept nutrients in groundwater), and where the depth to groundwater is relatively shallow to maximize the area of saturated thickness treated in the aquifer.

## Methodology for Selecting Non-Traditional Technology Scenarios

■ **FERTIGATION WELLS:** Golf courses were mapped to identify areas where fertigation wells could be utilized to recapture nitrogen-enriched groundwater and re-apply it to the managed turf areas to serve both irrigation and fertilization needs. Most golf courses were assumed to be eighteen holes with a fertilized area of 75 acres. Fertigation water was assumed to have an average concentration of 5 mg/liter. An uptake/attenuation rate of 80% was applied resulting in an assumed nitrogen reduction of 300 kg/year for each golf course with effectively located fertigation wells. In some cases other irrigated areas (such as athletic fields and cemeteries) were identified as potential fertigation locations. A nitrogen removal rate of 4 kg/Y/acre was used.

The MVP tool and other site-specific tools were utilized to quantify nitrogen load reductions for several potential NT interventions.

■ **PERMEABLE REACTIVE BARRIERS:** for each PRB that was identified during the prior GIS-screening process an approximate capture area was identified using available water table maps and the wMVP tool. Upgradient contributing areas were digitized within wMVP and the nitrogen load was calculated. A nitrogen reduction of 72.5% was applied (calculated as an average of the reported attenuation range from the Technologies Matrix).

■ **CONSTRUCTED WETLANDS (WITH COLLECTION):** Constructed wetlands were considered as a tertiary, polishing treatment for existing wastewater treatment plants. This included small-scale wastewater treatment systems. A nitrogen removal rate of 500 kg/Y/acre was used.

■ **AQUACULTURE/OYSTER REEFS:** Potential areas for aquaculture and/or oyster reef restoration were considered based upon discussions with town representatives and review of maps to identify potential areas for these operations without significant conflicts to navigation. In some cases actual recent aquaculture expansions were included where they were developed after the MEP reports were prepared. An assumption of 1 million oysters per acre was used with a nitrogen removal rate of 250 kg/Y/acres.

■ **FLOATING CONSTRUCTED WETLANDS:** Potential areas for floating wetlands were considered in areas where no conflicts with navigation or swimming areas were identified. A nitrogen removal rate of 0.4 kg/Y/sq foot was used.

■ **INLET WIDENING AND COASTAL HABITAT RESTORATION:** Only considered in areas where these projects were identified by towns or state agencies and where detailed hydrologic investigations and modeling had been performed due to wide variations in nitrate load reduction, flushing impacts, impacts on flooding, and costs (dredging only, replacing infrastructure,

removing and replacing roadways or bridges, etc.). Nitrogen removal rates were based on MEP or other studies.

■ **INNOVATIVE & ALTERNATIVE SEPTIC SYSTEMS AND ECOTOILETS:** In most cases specific locations for these technologies were not identified. Rather general estimates for the percent adoption were provided based upon discussions with the stakeholder groups and their views on potential adoption rates. In some watersheds a 5% adoption rate was included based upon this stakeholder input. In a limited number of instances specific locations for these technologies were included based upon town input and suggestions. A nitrogen removal rate of 1.658 kg/Y for each system was used for I&A Septic Systems, and 2.984 kg/Y for enhanced I&A systems. A removal rate of 2.542 kg/Y was used for each home installation of an Ecotoilet, and 0.467 kg/Y for installation of urine diversion toilets in public settings.

Finally, the locations of specific technologies were discussed during the 208 stakeholder engagement process. Stakeholders across the Cape 'groundtruthed' potential NT locations and NT scenarios were adjusted accordingly.

